

DL-581P

DL-581PW

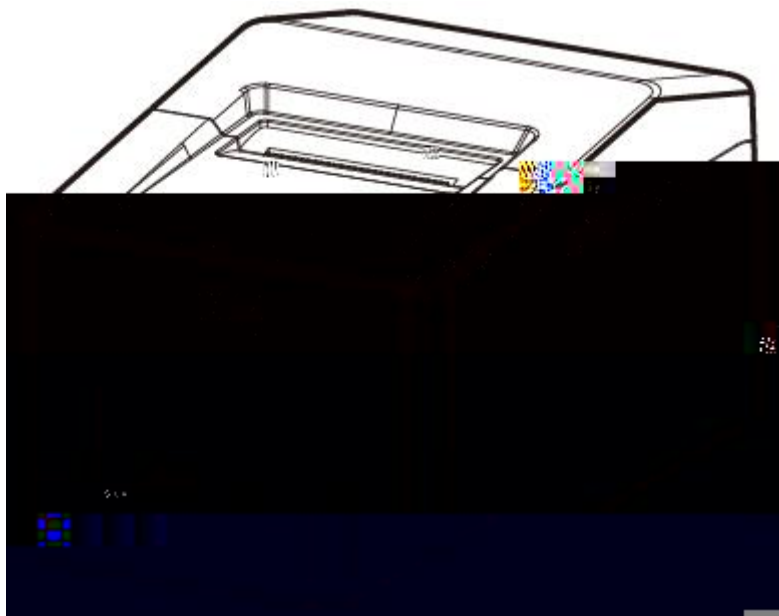

1.1

1.2

1.3

1.4

1.5

2.1

2.2

2.2.1

2.2.2

2.3

2.3.1

2.3.2

3.1

3.2

3.3

3.4

3.5

3.5.1

3.5.2 Windows

3.6

4

4.1 USB

4.2

4.3

5

5.1

5.2

5.3

5.4

2017

1.0





.

.

.

.

.

.

.



.



.

.

.

.

.

.

.



1

DL-581P/DL-581PW

POS

DL-581P/DL-581PW

USB

WINDOWS

XP/7/8/10/vista Linux

OPOS


1)

2)

3)


4)



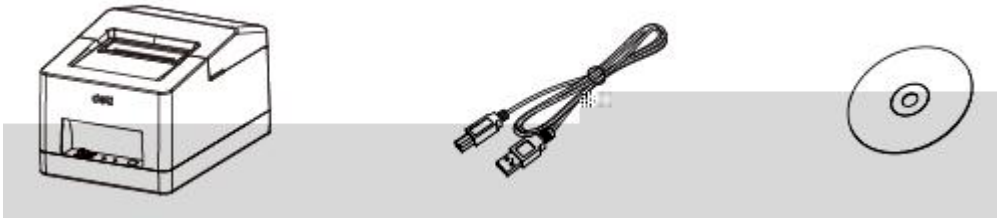



USB









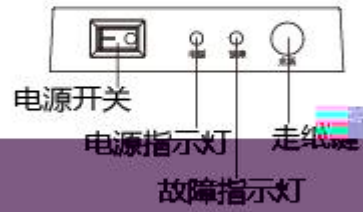

电源开关

操作面板

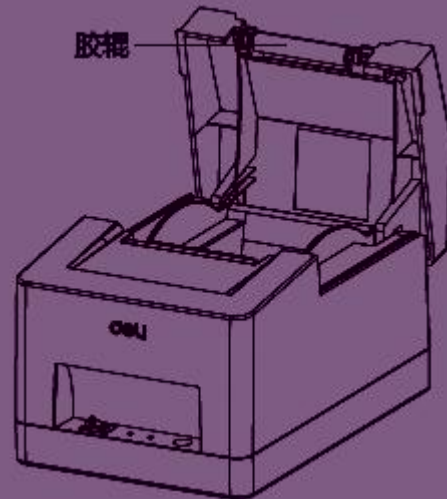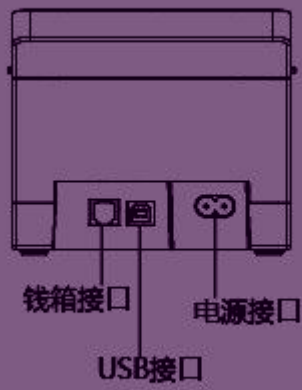



		203 dpi 8 dots/mm
		70mm/s
		48 mm
		1 4
		32-bit RSIC
		2MB
		AC100V-240V
		8V
		58±0.5mm
		0.050 0.090mm
		Max 70mm
		ESC/POS
		Windows XP/Win7/Win8/Win10/Vista/Linux/OPOS
		GBK 16*16 24*24dots
		ASCII 9×17 12×24dots
		PC437/Katakana/PC850/PC860/PC863/PC865/West Europe/ Greek/Hebrew/East Europe/Iran/WPC1252/PC866/PC852/ PC858/IranII/Latvian/Arabic/PT151,1251/PC737/WPC/ 1257/Thai Vietnam/PC864/PC1001/(Latvian)/(PC1001)/ (PT151,1251)/(WPC1257)/(PC864)/(Vietnam)/(Thai)
		(40K 64K)
		UPC-A, UPC-E, EAN8, EAN13, CODE39, ITF, CODEBAR, CODE128, CODE93
LED		
		5 to 50 25% to 85%RH
		-40 to 60 10% to 90%RH
	(* *)	187.9X113.9X130
		570.5G
	TPH	50km
		CCC

1)

2) mm

3) 0.050 ~ 0.090mm

4)

FD 210,PD150R,PD160R	OJI Paper CO., LTD.





1)

2)

3)

4)


5) 70°C ,

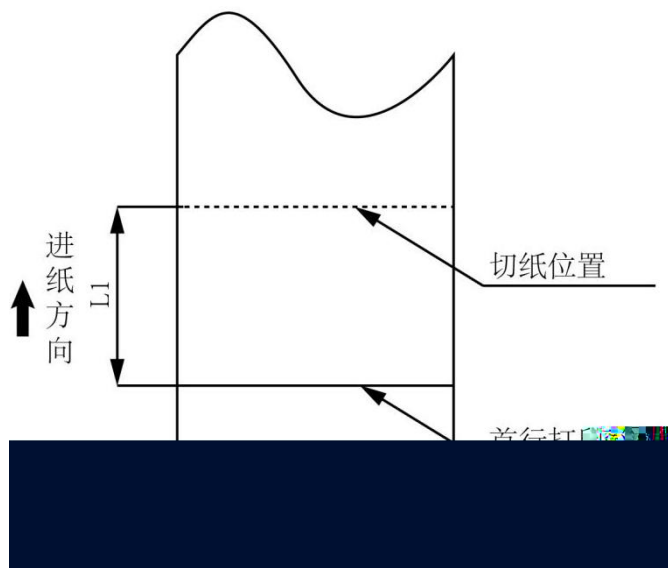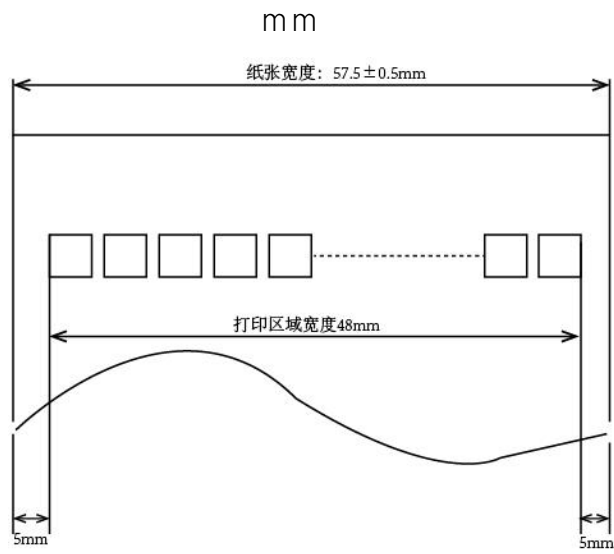




	L1
DL-581P/DL-581PW	7.5mm

3


- 1.
- 2.

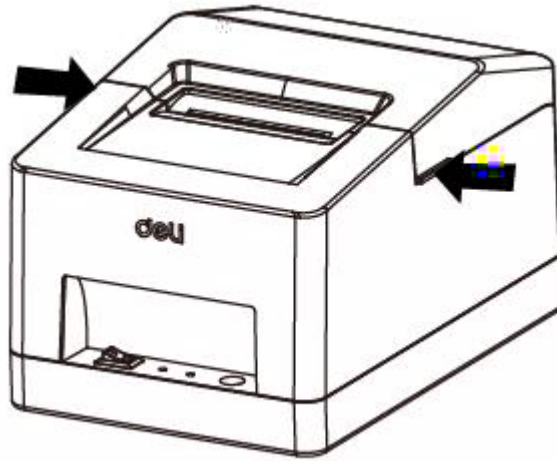


- 3.

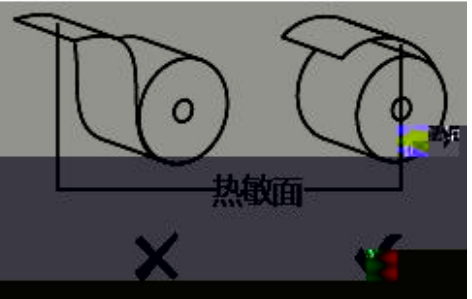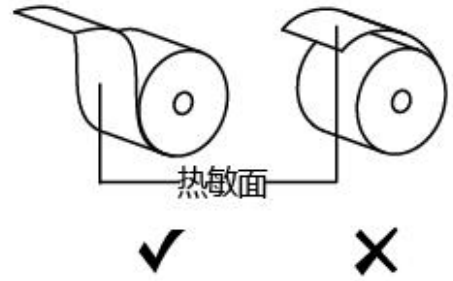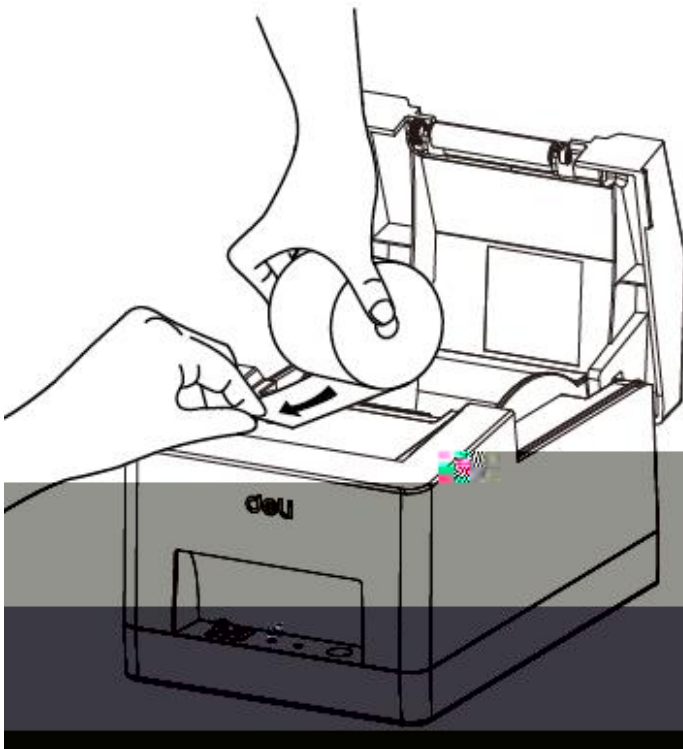


4.

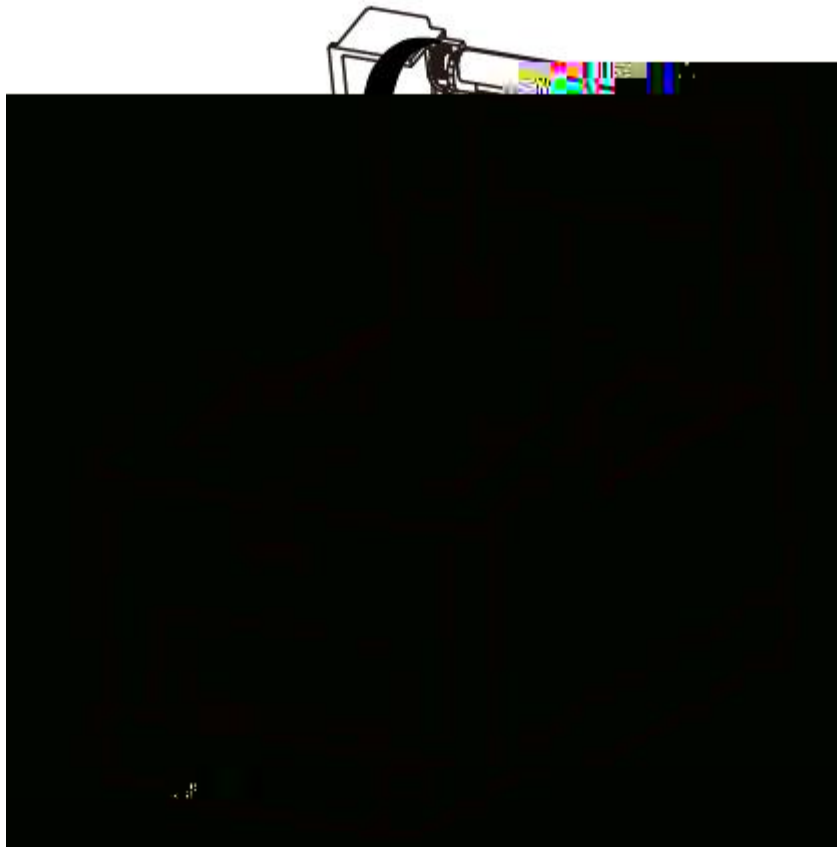

5.

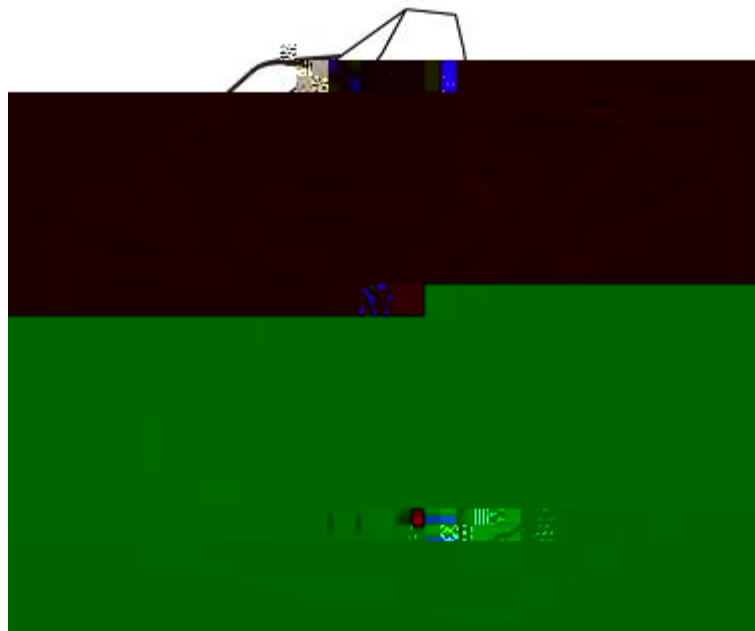

- 1.
- 2.
- 3.

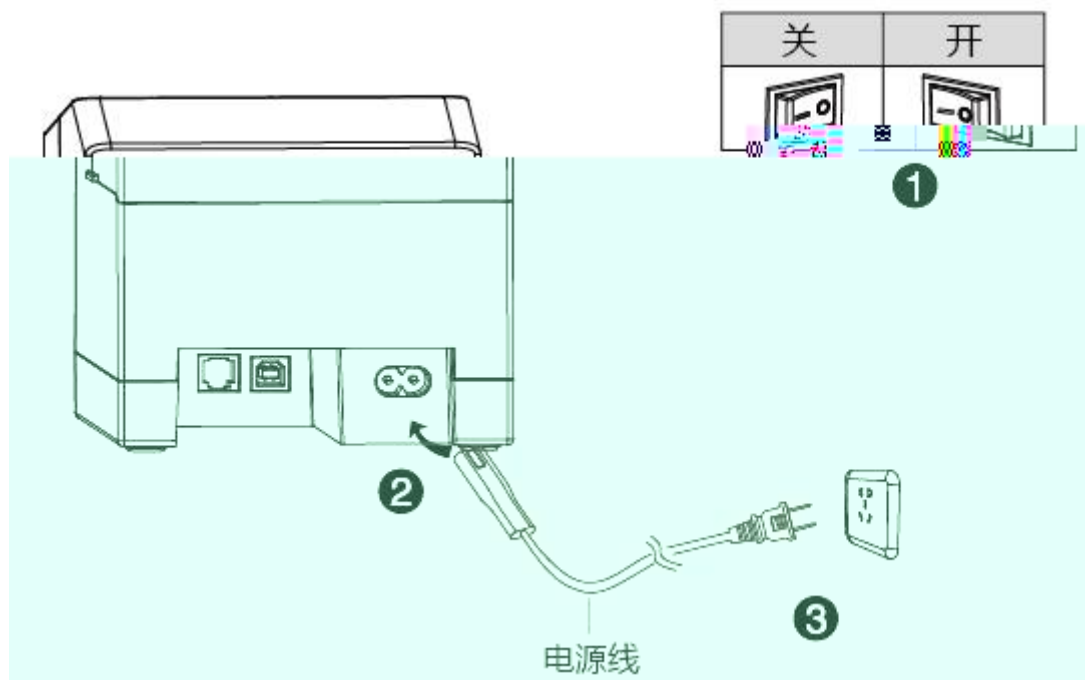



" "

" "



1,

2,

3,

4,


(SMARTPHONE ,POCKET PC,PALM,

)




DL-581P/DL-581PW

USB




1	VBUS
2	D-
3	D+
4	GND



1	FG
2	Drawer 1
3	DRSW
4	VDR
5	Drawer 2
6	GND

" " " "



1	+ 24V
2	GND
3	N.C
SHELL	F.G







		TPH
		TPH

6

6.1

6.2

1:

0	SJ/T 11363-2006
X	SJ/T 11363-2006

2

